

Figure 1

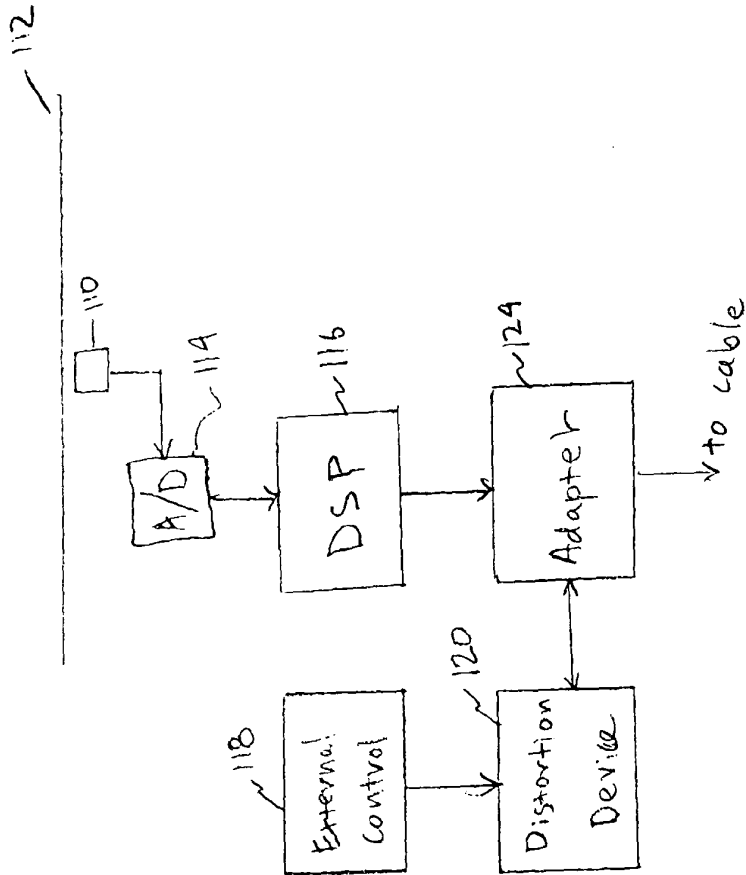


Figure 2

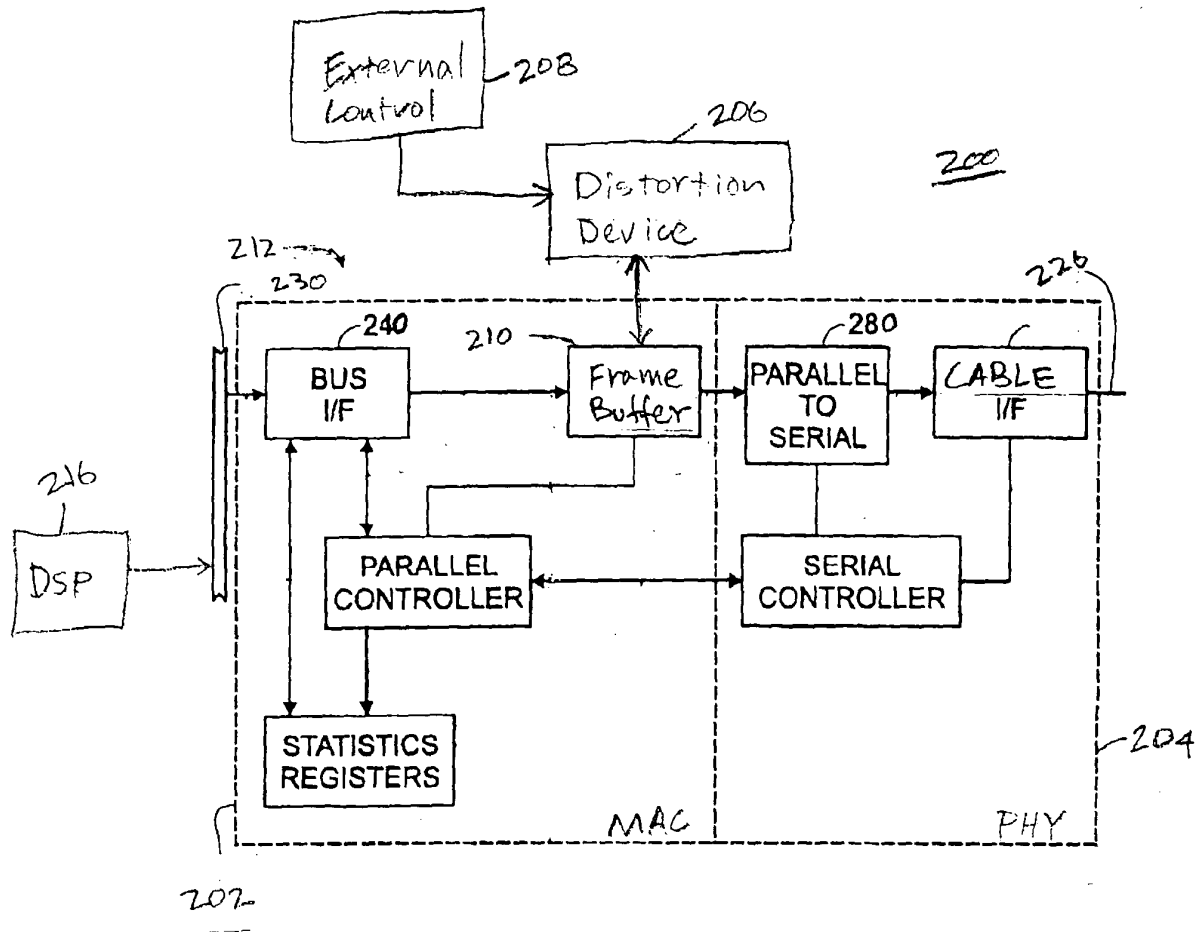


Figure 3

300

Octets	Field	Size in Octets
0 - 7	Preamble	8
8 - 13	Destination MAC Address	6
14 - 19	Source MAC Address	6
20 - 21	Length = 0xC4	2
22 - 24	LLC Header = AA-AA-03	3
25 - 29	SNAP Header = 00-00-00-xx-xx	5
30 - 217	MaGIC Payload	188
218 - 221	FCS	4

302 {

304 -

306 }

Figure 4

400

Octets	Field	Size
30 - 33	Configuration	4 octets
34 - 37	Frame Count / Timecode	One 32-bit word
38 - 41	Media Data Slot Valid Bits	One 32-bit word
42 - 169	Media Data Slots	Thirty-two 32-bit words
170 - 173	Reserved	4 octets
174 - 185	Control Header	12 octets
186 - 217	Control Data	32 octets

402 -

40A }

Figure 5